

## DESCRIPTION:

° LH 16 – Pneumatic sealing gun suitable for the application of steel, inox eyelet seals 13.mm diam. (our product art. 114/Inox).


°The pneumatic operation is carried out with air pressure between 6 and 8 atm.

°The seals are loaded in the rear barrel (A) and position themselves automatically along the shoot.

° The sealing gun is operated by one button (B) which triggers the sealing action.

The button has to be pushed and held until the seal is correctly applied. (approx 1 second per application).

BARREL HOLDING CAPACITY:  
approx. 200-300 seals each time

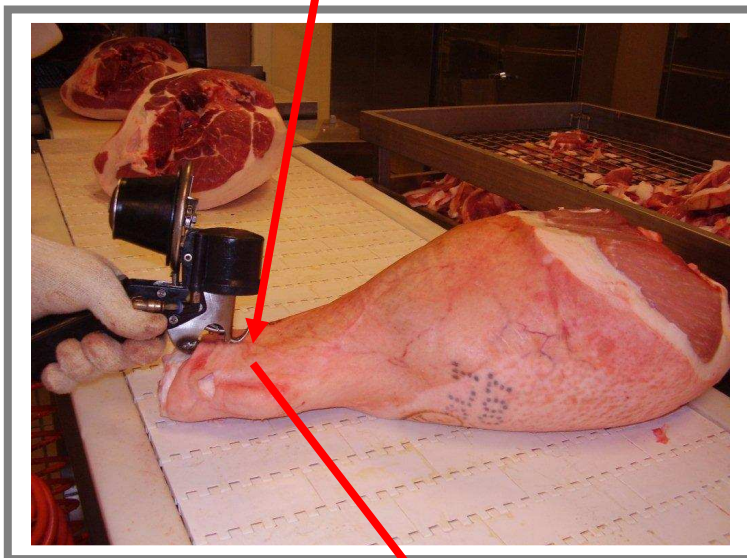

SECURITY SEALS FOR INDUSTRIES AND TRANSPORTS - TAMPERING PREVENTION SYSTEMS



**LEGHORN** s.r.l. Via degli Arrotini 36 – 56121 Livorno  
Tel: 0586 406376 – Fax: 0586 407621  
[www.leghornseals.com](http://www.leghornseals.com) – [info@leghornseals.com](mailto:info@leghornseals.com)

